

TECHNICAL

GRZEGORZ TĘGOS

Technika Napędu i Transmisji Mocy

www.technical.pl

e-mail: biuro@technical.pl

tel. +48 63 27 25 487; +48 63 26 16 257

Koła pasowe Klinowe SPA
do rozwiertu

Dimensions of V-Pulleys PT - solid hub




PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
50	1	1	32*	35	20	15
	2	1	40*	45	35	10
	3	1	40*	54	50	4
56	1	1	35**	35	20	15
	2	1	40**	45	35	10
	3	1	40**	54	50	4
63	1	1	40	35	20	15
	2	1	40	45	35	10
	3	1	40	54	50	4
	4	1	40	68	65	3
	5	1	40	84	80	4
71	1	1	40	35	20	15
	2	1	50	45	35	10
	3	1	52	54	50	4
	4	1	52	68	65	3
	5	1	52	84	80	4
75	1	1	40	35	20	15
	2	1	50	45	35	10
	3	1	52	54	50	4
	4	1	52	68	65	3
	5	1	52	84	80	4
80	1	1	45	35	20	15
	2	1	50	45	35	10
	3	1	62	54	50	4
	4	1	62	68	65	3
	5	1	62	84	80	4
85	1	4	45	35	20	15
	2	1	50	45	35	10
	3	1	62	54	50	4
	4	1	62	68	65	3
	5	1	62	84	80	4
90	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	1	68	68	65	3
	5	1	68	84	80	4
95	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	1	68	68	65	3
	5	1	68	84	80	4
100	1	4	45	35	20	15
	2	1	60	45	35	10
	3	1	62	54	50	4
	4	2	70	50	65	15
	5	2	70	50	80	30
106	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2	68	50	65	15
	5	2	68	50	80	30
112	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2	68	50	65	15
	5	2	68	50	80	30
118	1	4	60	35	20	15
	2	4	60	45	35	10
	3	1	70	50	50	-
	4	2	70	50	65	15
	5	2	80	50	80	30

» PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
125	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
132	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
140	1	4	60	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
150	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
160	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
170	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
180	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
190	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
200	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
224	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
236	1	4	68	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
250	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15

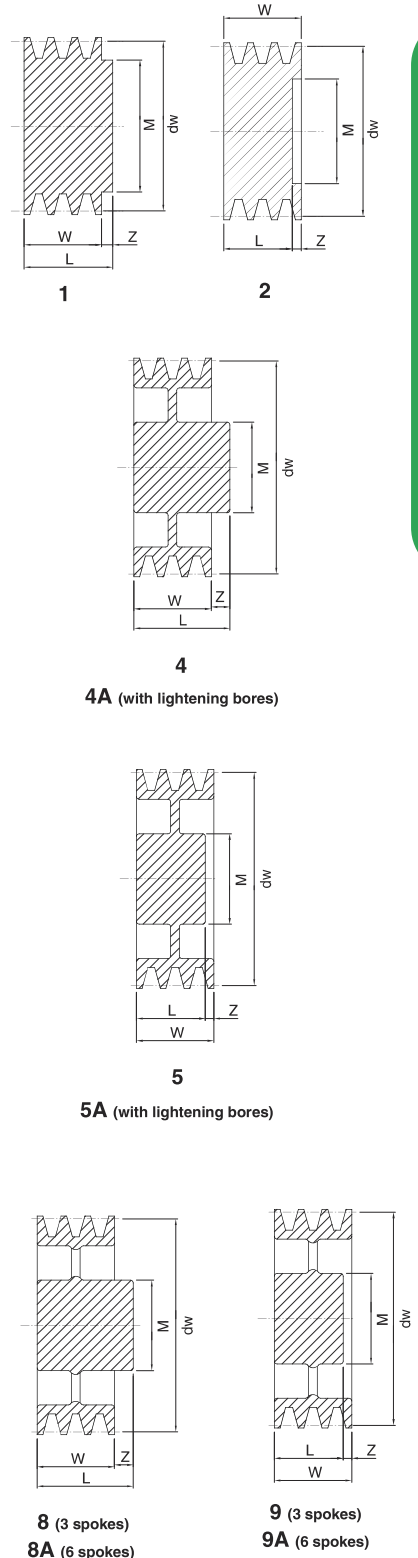


* Note: the diameter at the bottom of the groove is 32 mm
 ** Note: the diameter at the bottom of the groove is 34 mm

Dimensions of V-Pulleys PT - solid hub




» PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
280	1	8	68	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15
300	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
315	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
	355	2	8	88	60	35
3		8	88	60	50	10
4		9	88	60	65	5
5		9	96	70	80	10
400		1	8A	78	50	20
	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	96	65	65	-
	5	9A	96	70	80	10
450	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	500	2	8A	88	60	35
3		8A	96	65	50	15
4		8A	104	70	65	5
5		9A	104	70	80	10
560		2	8A	88	60	35
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	630	3	8A	104	65	50
4		8A	112	70	65	5
5		9A	120	75	80	5
800	3	8A	128	100	50	50
	4	8A	128	100	65	35
	5	8A	145	110	80	30



8 (3 spokes)
8A (6 spokes)



9 (3 spokes)
9A (6 spokes)

Koła pasowe klinowe do rozwiertu i ich wymiary