


CONTI®VFO

1BTZ X†TLPQSPGJMPXF EP XZNB
OBQ'EØX [HPEOF [%*/ J %*/



8'B`DJXP`DJ:

- ;BLSFT UFNQFSBUVS i\$ UP i\$
- #BSE[P EPCSB FMBTUZD[OP`% E[J'LJ XZQSPGJMPXBOZN ['CPN
- .PÅMJXP`% EPCJFSBOJB X [FTQP'Z QBTPXF - - PE NN
- "OUZTUBUZH D4OF
- 8BSVOLPEKOPSOF OB PMFK
- 0EQPXJEMBJFNBUØX USPQJLBMOZDI
- 0EQPSOF OB LVS[QZ'

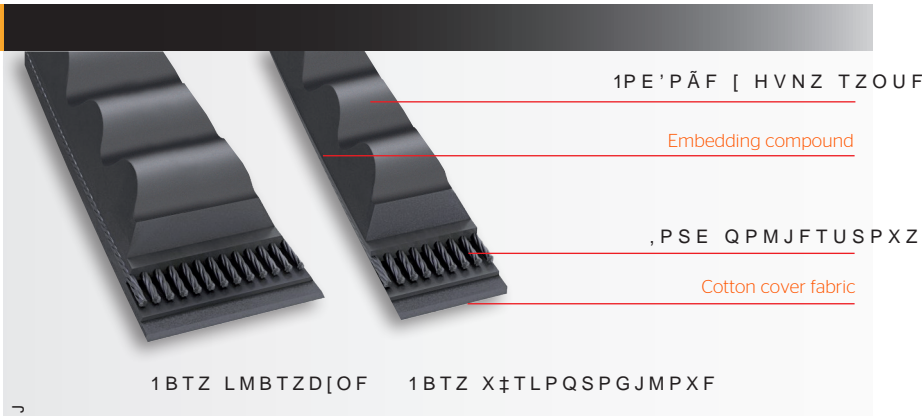

1BTZ LMBTZD[OF

Profil	: B S F E ' V H, R m r D J L
ZX	505 - 2105
AX	513 - 2697
BX	703 - 3091
CX	1132 - 3062

1BTZ X†TLPQSPGJMPXF

Profil	: B L S F T E ' J (H r F) ` D J
XPZ	512 - 2800
XPA	732 - 2932
XPB	1250 - 2900
XPC	2000 - 2800

1PSØXOBOJF QSPEVLUØX:



5SF`% UFK QVCMJLBDKJ OJF KFTU QSBXOJF XJ†Å†DB J NB DIBSBLUFS XZ†D[OJF JOGPSNBDZKOZ ;OBLJ UPXBS
J MVC KFK TQØ'FL [BMFÅOZDI 1SBXB BVUPSTLJF a \$POUJ5FDI "(8T[FMLJF QSBXB [BTUS[FÄPOF 1F'OF J