




# CONTI®V MULTIBELT

1BTZ LMJOPXF EP OBQ'EØX P EVÄZ  
PODJ ‡ ÄFOJB

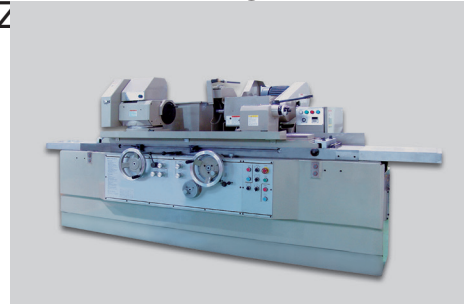

8 'BDJXP`DJ:

- o ;BLSFT UFNQFSBUVS i\$ UP i\$
- o ;XJ'LT[POB Q'ZOOP`% QSDZ
- o "OUZTUBUZD[OF XH \*40
- o 8BSVOLPEKQPSØMFKB
- o 0EQPXJEMBJFNBJUSØQJLBMOZDI
- o 0EQPSOF OB LVS[ QZ'

4USVLUVSB QBTB LMJOPXFHP




Profil	; BLSFT E ' Vmtr / Dg (mm)
3V (9J)	3V 465 - 3V 1400 / 9J 1181 - 9J 3556
5V (15J)	5V 670 - 5V 3550 / 15J 1702 - 15J 9017
8V (25J)	8V 1000 - 8V 5600 / 25J 2540 - 25J 14224

Profil	; BLSFT E ' Vmtr / LD (mm)
A/HA	1450 - 2240 / 1486 - 2276
B/HB	1106 - 6518 / 1168 - 6580
C/HC	2500 - 12145 / 2575 - 12220

Profil	; BLSFT E ' Vmtr`DJL
SPZ	1250 - 3000
SPA	1000 - 4000
SPB	1590 - 7500
SPC	2650 - 11200

1PSØXOBOJF QSPEVLUØX:

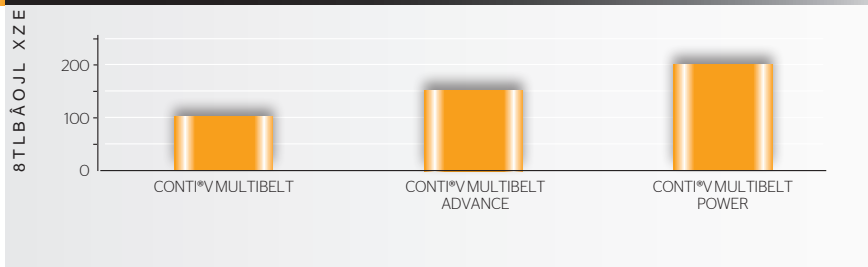

% ZTUSZCVUPS  
CJVSP!UFDIOJDBM QM

5SF`% UFK QVCMJLBDKJ OJF KFTU QSBXOJF XJ‡Ä‡DB J NB DIBSBLUFS XZ'‡D[OJF JOGPSNBDZKOZ ;OBLJ UPXBS  
J MVC KFK TQØ'FL [BMFÄOZDI 1SBXB BVUPSTLJF ` \$POUJ5FDI "( 8T[FMLJF QSBXB [BTUS[FÄPOF 1F'OF J